



Adjustable Non-Concussive Toggle Lever Valves (Self Closing)



Illustrated below is a range of Toggle Lever Valves for easy operation. When fitted with a red and blue indexed ball they are even easier to operate for the blind, disabled, elderly and small children.

NC2754 Bibcock
With toggle action. 1/2" inlet. Chrome plated. W.R.A.S. listed.

NC2750 Pillar Valve
With toggle action. 1/2" or 3/4" inlet. Chrome plated. W.R.A.S. listed.


NC2750B Pillar Valve
As NC2750 but with ball lever.



Non-Concussive Knee-Action Valve

NC2722 Knee-action Valve. The foremost application for this valve is in installations where hygiene is of the utmost importance. Using a knee-operated valve reduces the risk of cross infection that can occur where hand-operated valves are used. Hospitals, laboratories and clinics, and establishments where food is served or manufactured are examples of where these valves should be specified.

The knee-operated valve is also recommended for use in institutions where handicapped or frail patients have difficulty in using conventional water fittings. The Barwil knee-operated valve is normally installed at a convenient height under the basin or sink, and can be operated with a light pressure with the knee in any direction. All metal parts of the fitting are chromium-plated and the control lever is fitted with a non-slip knee pad.

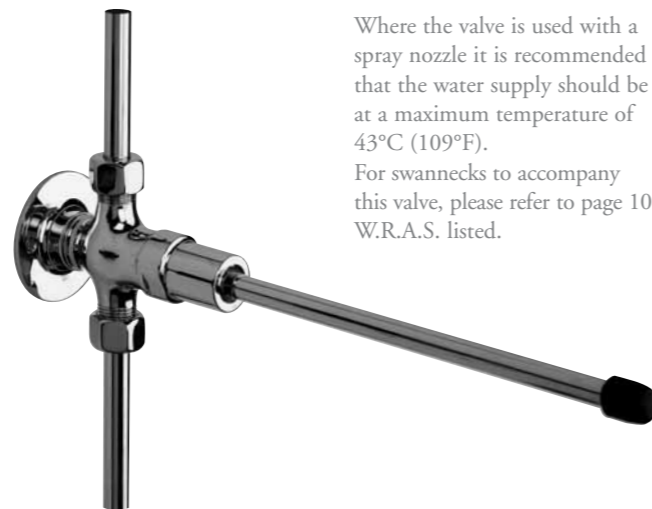

Where the valve is used with a spray nozzle it is recommended that the water supply should be at a maximum temperature of 43°C (109°F). For swannecks to accompany this valve, please refer to page 10. W.R.A.S. listed.

Non-Concussive Grip Valves (Self Closing)

NC2733 Grip Valve
With insulated handle and body. Designed for attaching to the end of flexible rubber or metallic tubing. These valves are particularly suitable for swilling down purposes as the flow of water is easily remote controlled from the source of supply. For example, it can be specified for use in hotel kitchens, food processing plants and hospital sluice and autopsy rooms. The insulated handle and body make this valve safe to handle when used with hot water. The valve can be supplied with jet or rose attachments as illustrated on page 10, and is available in chromium plate or brass finish. Size 1/2" only.

NC2730 Grip Valve
As No. 2733 but with shorter inlet and non-insulated handle and body.

Accessories For 2733 and 2730 Grip Valves (see page 10)

GV05 1" Diameter Rose Attachment

GV10 2" Diameter Rose Attachment

GV15 Jet Attachment

GV20 90° Elbow Attachment
For front of valves. Suitable for use with the jet or roses.

GV30 Wall Hook
For suspending valves when fitted with GV20 90° Elbow.

